



Криві продуктивності Mono R32 26кВт Повний інверторний тепловий насос

Теплопродуктивність																	
			80Hz		75Hz		70Hz		65Hz		60Hz		55Hz		50Hz		
Ambient (°C) \ Outlet (°C)	-25	-20	-15	-10	-7	-5	0	2	5	7	10	15	20	25	30	35	40
30	####	13.86	15.60	16.91	17.74	18.57	22.34	24.25	26.16	27.52	28.75	25.23	27.22	28.73	29.12	29.33	29.53
35	####	13.47	15.14	16.46	17.26	18.16	21.75	23.48	25.11	26.08	27.37	24.25	25.99	27.39	27.95	28.22	28.20
40	####	13.08	14.69	16.01	16.79	17.75	21.17	22.71	24.07	25.05	26.00	23.26	24.75	26.04	26.79	27.11	26.86
45	####	12.69	14.23	15.57	16.31	17.35	20.58	21.94	23.02	23.82	24.63	22.28	23.52	24.70	25.62	26.00	25.53
50	####	12.30	13.77	15.12	15.83	16.94	19.99	21.17	21.97	22.58	23.26	21.29	22.28	23.35	24.45	24.89	24.20
55	9.62	11.91	13.32	14.68	15.36	16.53	19.41	20.40	20.93	21.35	21.89	20.31	21.05	22.01	23.29	23.78	22.86
60		11.52	12.86	14.23	14.88	16.12	18.82	19.63	19.88	20.11	20.52	19.32	19.81	20.66	22.12	22.67	21.53

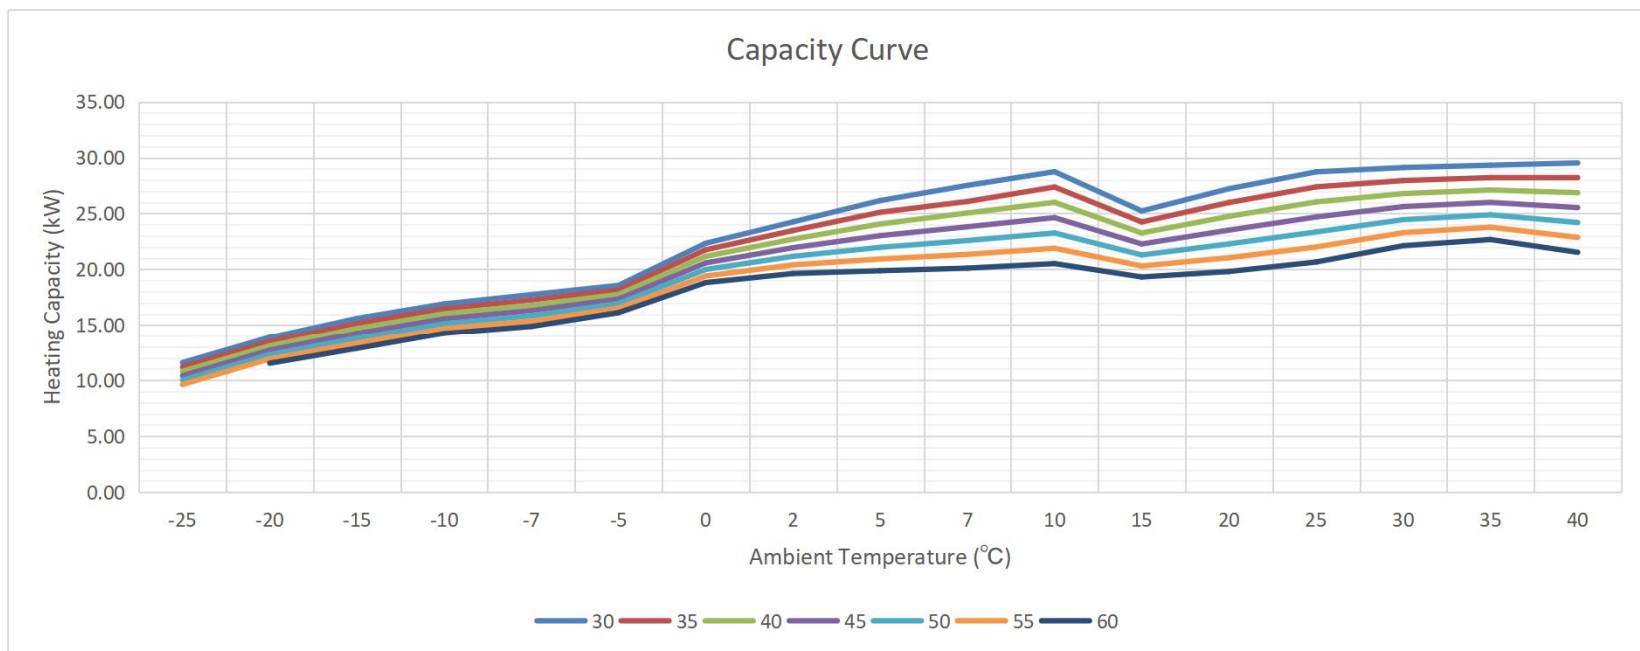

Power Input																	
		Ambient (°C)															
Outlet (°C)		-25	-20	80Hz	-10	75Hz	-5	70Hz	5	65Hz	7	60Hz	15	55Hz	25	50Hz	40
		30	6.51	6.44	6.35	6.21	6.23	6.16	6.13	6.15	6.15	6.15	6.22	5.13	4.61	4.31	3.51
		35	7.01	6.94	6.43	6.38	6.32	6.27	6.21	6.25	6.29	6.32	6.36	5.44	4.52	4.52	3.78
		40	7.52	7.45	7.15	7.12	7.09	7.06	7.03	7.05	7.07	7.09	7.12	6.20	5.28	5.19	4.20
		45	8.02	7.95	7.87	7.87	7.86	7.86	7.85	7.86	7.86	7.87	7.87	6.67	5.46	5.57	4.63
		50	8.52	8.45	8.70	8.67	8.65	8.62	8.59	8.33	8.07	7.81	7.55	6.35	5.14	5.46	4.97
		55	9.03	8.96	9.20	9.12	9.04	8.96	8.88	8.47	8.06	7.64	7.23	6.78	6.33	6.11	5.88
		60		9.46	9.35	9.23	9.12	9.06	8.96	8.51	8.12	7.75	7.33	6.95	6.45	6.21	6.03

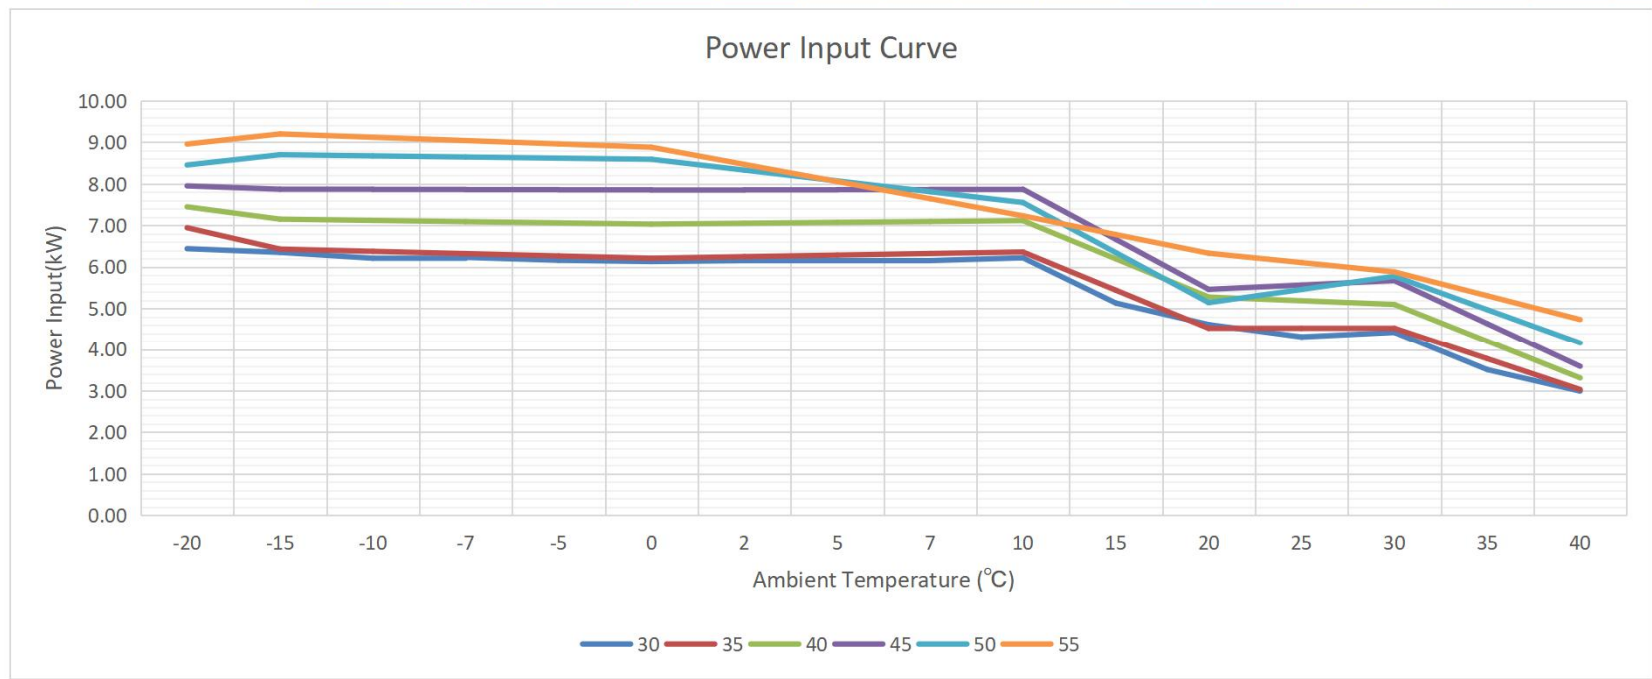

COP																	
Outlet (°C) \ Ambient (°C)																	
	-25	-20	80Hz -15	-10	75Hz -7	-5	70Hz 0	2	65Hz 5	7	60Hz 10	15	55Hz 20	25	50Hz 30	35	40
30	1.78	2.15	2.46	2.72	2.85	3.01	3.64	3.94	4.25	4.47	4.62	4.92	5.90	6.67	6.59	8.35	9.88
35	1.60	1.94	2.36	2.58	2.73	2.90	3.50	3.76	4.00	4.12	4.30	4.46	5.75	6.06	6.18	7.47	9.31
40	1.44	1.76	2.05	2.25	2.37	2.51	3.01	3.22	3.40	3.53	3.65	3.75	4.69	5.02	5.26	6.45	8.12
45	1.30	1.60	1.81	1.98	2.07	2.21	2.62	2.79	2.93	3.03	3.13	3.34	4.31	4.44	4.52	5.62	7.11
50	1.17	1.46	1.58	1.74	1.83	1.97	2.33	2.54	2.72	2.89	3.08	3.36	4.33	4.28	4.23	5.01	5.82
55	1.07	1.33	1.45	1.61	1.70	1.84	2.19	2.41	2.60	2.79	3.03	2.99	3.32	3.60	3.96	4.48	4.83
60		1.22	1.38	1.54	1.63	1.78	2.10	2.31	2.45	2.59	2.80	2.78	3.07	3.33	3.67	4.21	4.37

