



Криві продуктивності 23 кВт R32 EVI Повний інверторний тепловий насос для опалення та охолодження

Теплова потужність (кВт)																	
Ambient (°C)	-25	-20	70Hz -15	-10	65Hz -7	-5	60Hz 0	2	55Hz 5	7	50Hz 10	15	45Hz 20	25	40Hz 30	35	40
30	10.24	12.26	13.80	14.95	15.69	16.43	19.76	21.45	23.14	24.34	25.43	23.43	24.08	25.42	25.76	25.94	26.12
35	9.90	11.92	13.40	14.56	15.27	16.07	19.24	20.77	22.22	22.49	24.22	22.52	22.99	24.23	24.73	24.96	24.94
40	9.55	11.57	12.99	14.17	14.85	15.70	18.72	20.09	21.29	22.16	23.00	21.60	21.89	23.04	23.70	23.98	23.76
45	9.20	11.23	12.59	13.77	14.43	15.34	18.21	19.41	20.36	21.07	21.79	20.69	20.80	21.85	22.66	23.00	22.58
50	8.86	10.88	12.18	13.38	14.01	14.98	17.69	18.73	19.44	21.01	20.58	19.78	19.71	20.66	21.63	22.02	21.40
55	8.51	10.54	11.78	12.98	13.58	14.62	17.17	18.05	18.51	21.92	19.36	18.86	18.62	19.47	20.60	21.04	20.23
60	0.00	10.19	11.38	12.59	13.16	14.26	16.65	17.37	17.59	17.79	18.15	17.95	17.52	18.28	19.57	20.05	19.05

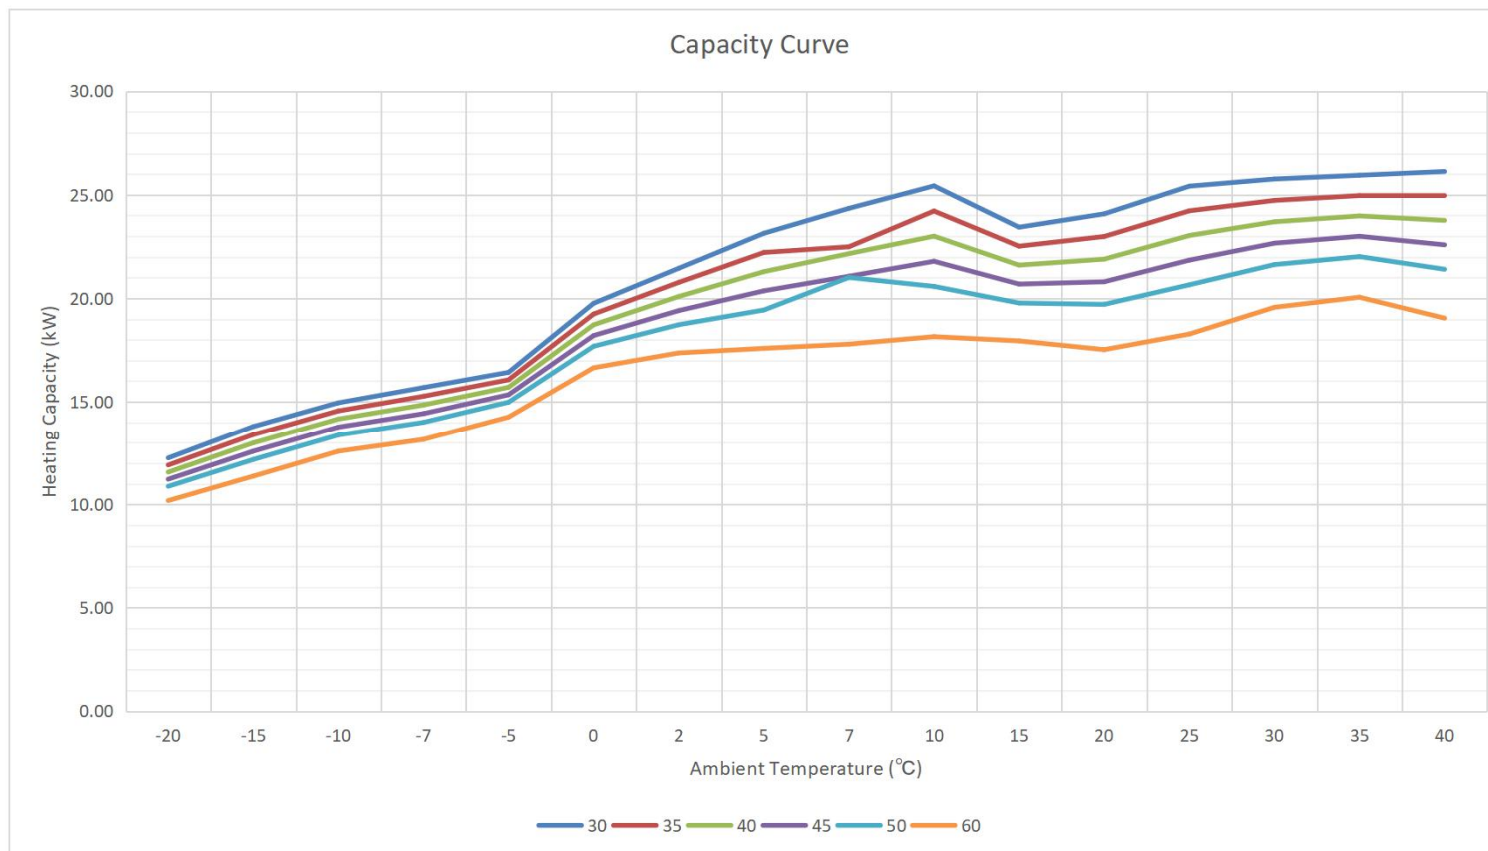

Power Input																	
(°C) \ Ambient																	
	-25	-20	70Hz -15	-10	65Hz -7	-5	60Hz 0	2	55Hz 5	7	50Hz 10	15	45Hz 20	25	40Hz 30	35	40
30	5.60	5.54	5.46	5.34	5.36	5.30	5.27	5.29	5.29	5.29	5.35	4.41	3.96	3.71	3.80	3.02	2.57
35	6.03	5.97	5.53	5.48	5.44	5.39	5.34	5.37	5.41	5.44	5.47	4.68	3.89	3.89	3.89	3.25	2.61
40	6.46	6.40	6.15	6.12	6.10	6.07	6.05	6.06	6.08	6.10	6.12	5.33	4.54	4.46	4.38	3.61	2.85
45	6.90	6.84	6.77	6.76	6.76	6.76	6.75	6.76	6.76	6.76	6.77	5.73	4.70	4.79	4.88	3.98	3.09
50	7.33	7.27	7.48	7.46	7.43	7.41	7.39	7.16	6.94	6.72	6.49	5.46	4.42	4.69	4.97	4.27	3.58
55	7.76	7.70	7.91	7.84	7.77	7.71	7.64	7.28	6.93	6.57	6.22	5.83	5.44	5.25	5.06	4.56	4.07
60	0.00	8.14	8.04	7.94	7.84	7.79	7.71	7.32	6.98	6.67	6.30	5.98	5.55	5.34	5.19	4.63	4.24

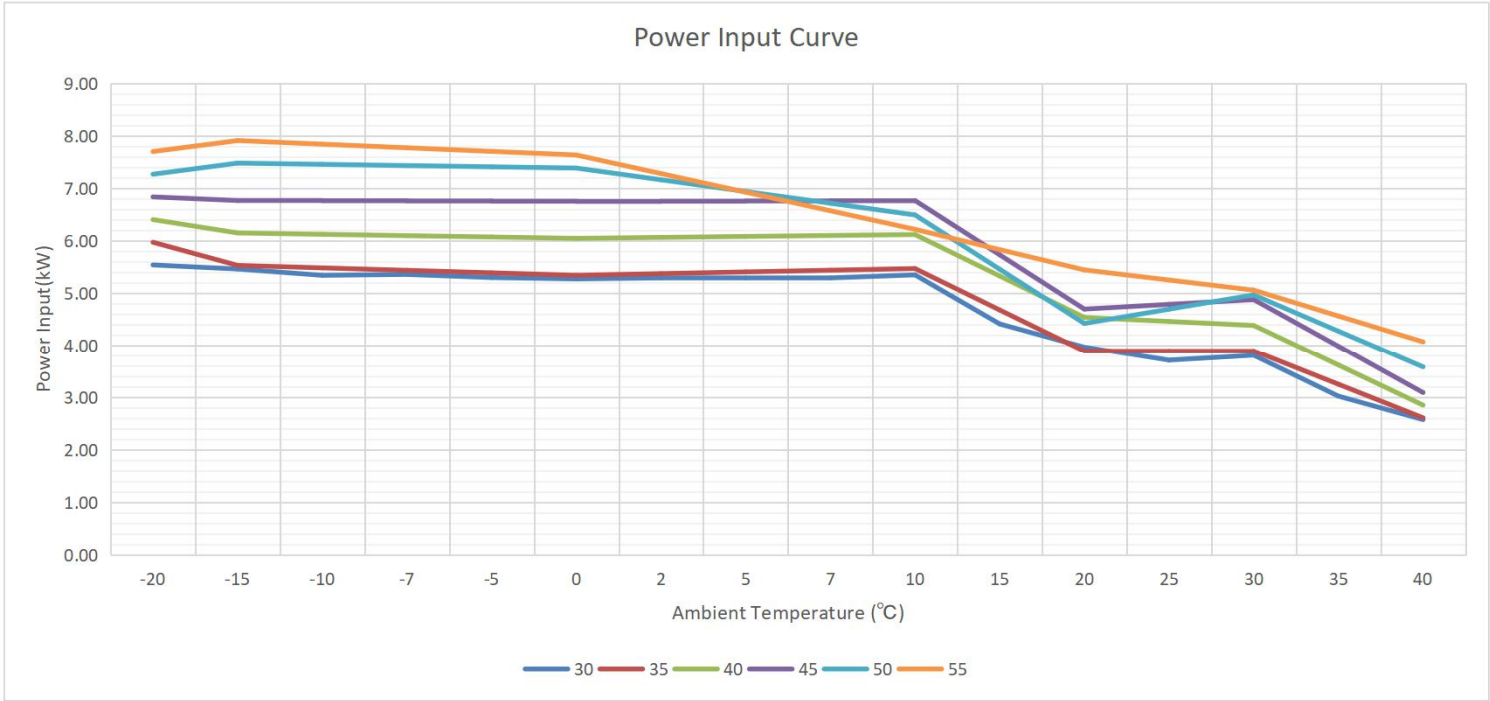

COP																	
(°C)	Ambient		70Hz		65Hz		60Hz		55Hz		50Hz		45Hz		40Hz		
	-25	-20	-15	-10	-7	-5	0	2	5	7	10	15	20	25	30	35	40
30	1.76	2.13	2.43	2.69	2.81	2.98	3.60	3.89	4.20	4.42	4.56	5.10	5.83	6.58	6.51	8.25	9.75
35	1.58	1.92	2.33	2.55	2.70	2.86	3.46	3.71	3.95	4.27	4.25	4.62	5.68	5.98	6.11	7.38	9.19
40	1.42	1.73	2.03	2.22	2.34	2.48	2.97	3.18	3.36	3.49	3.61	3.89	4.63	4.96	5.19	6.37	8.01
45	1.28	1.58	1.79	1.95	2.05	2.18	2.59	2.76	2.89	2.99	3.09	3.47	4.25	4.38	4.46	5.54	7.02
50	1.16	1.44	1.56	1.72	1.81	1.94	2.30	2.51	2.69	3.00	3.04	3.48	4.28	4.22	4.18	4.95	5.74
55	1.05	1.31	1.43	1.59	1.68	1.82	2.16	2.38	2.57	2.68	2.99	3.11	3.28	3.56	3.91	4.43	4.77
60	0.00	1.20	1.36	1.52	1.61	1.76	2.07	2.28	2.42	2.56	2.76	2.88	3.03	3.29	3.62	4.16	4.31

